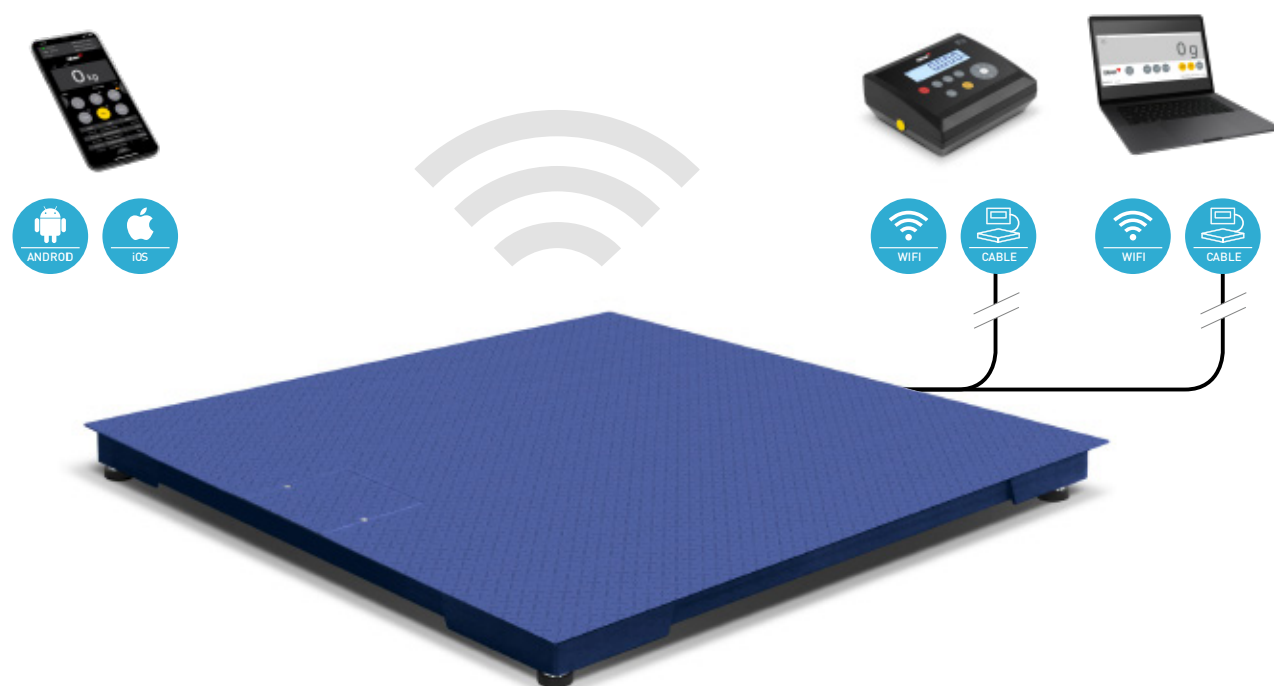




High strength, for intensive use

- Platform with fully digital Xtrem weighing core.
- 2-layer epoxy coating, Class C3 sensors and IP67 protection.
- Fully autonomous, data sent to an indicator, PC, tablet or iOS or Android smartphone*.
- Maximum safety: important adjustment and calibration data incorporated in the platform.
- Connects to WiFi network* and sends the data to any equipment connected to the IP network.
- Total flexibility: Sends the data via cable and WiFi.

Hold

→T←

Time	Item
09:07:46	7638900295641
12:10:26	7638900295641

Digital core



Xtrem digital module integrated inside.

*Optional.



**Strong**

Upper surface of 4.5 mm provides sufficient strength for daily use.

**Easy maintenance**

Upper access to the adjustment junction box for easy maintenance of equipment.






Model	Dimensions (mm)	Height (mm)
RM-10	1000 x 710	105
RM-12	1200 x 710	105
RM-15	1500 x 710	105
RL-10	1000 x 1150	105
RL-12	1200 x 1150	105
RL-15	1500 x 1150	105

Practical with its access ramp

Two types of ramp, short size model (RM) and long double-angle model (RL), with greater ease of access to insert pallet trucks more easily.

Rampa RM**Rampa RL**

Model	Xtrem XBengal 1210 - 1,5T	Xtrem XBengal 1210 - 3T	Xtrem XBengal 1212 - 1,5T	Xtrem XBengal 1212 - 3T	Xtrem XBengal 1512 - 1,5T	Xtrem XBengal 1512 - 3T	Xtrem XBengal 1515- 1,5T	Xtrem XBengal 1515 - 3T	Xtrem XBengal 2015 - 1,5T	Xtrem XBengal 2015 - 3T
Reference	6710	6711	6718	6375	6712	6713	6714	6715	6717	6716
Capacity	1500 kg	3000 kg	1500 kg	3000 kg	1500 kg	3000 kg	1500 kg	3000 kg	1500 kg	3000 kg
Resolution	500 g	1000 g	500 g	1000 g	500 g	1000 g	500 g	1000 g	500 g	1000 g
Weighing units	g, kg, lb, oz									
Connectivity	RS 232-C, WiFi (optional)									
Transmission speed	9600, 19200, 38400, 57600, 115200 bauds									
Power	Adapter 230 V/50 Hz (Euro) 7.5 Vdc or via indicator									
Working temperature	-10°C / +40°C									
Sheet metal thickness	4.5 mm									
Structure	Steel with baked epoxy paint									
Load cells	4 H8C Rebel cells									
Junction box	Hermetic with IP68 protection, in AISI 304 stainless steel									
Dim. platform (mm)	1200 x 1000		1200 x 1200		1500 x 1200		1500 x 1500		2000 x 1500	
Minimum height	106									
Maximum height	131									
Platform net weight (kg)	73		84		103		122		155	
Packaging dim.	1210 x 1010 x 150		1210 x 1210 x 150		1510 x 1210 x 150		1510 x 1510 x 150		2010 x 1510 x 150	
Total weight with packaging (kg)	85		99		121		144		179	

External dimensions (mm)**Xtrem Bengal 1210****Xtrem Bengal 1212****Xtrem Bengal 1512****Xtrem Bengal 1515****Xtrem Bengal 2015**



► K3 INDICATOR

Compatible **XTREM**

Ref.	Model	Connection
6170	K3-W	WiFi

Ref.	Model	Connection
6170	K3-X	Cable



► K3i INDICATOR

Compatible **XTREM**

Ref.	Model	Connection
6171	K3i-W	WiFi

Ref.	Model	Connection
6171	K3i-X	Cable



► K3i Printer INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60960	K3i Printer	100,000 divisions



► SC2 INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
5305	SC2 (*)	30,000 divisions



► K4i INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60136	K4i (*) M	30,000 / 60,000 div.



► K2 INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60018	K2 (*) M	60,000 divisions



► K2E INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60020	K2E (*) M	60,000 divisions



► K2N INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60019	K2N (*) M	60,000 divisions



► K2P INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60022	K2P (*) M	60,000 divisions



► VERIFICATION

Ref.	Certifications
8031	CE verification certificate from 601 kg to 1500 kg (*) M
8032	CE verification certificate from 1501 kg to 3000 kg (*) M

Ref.	Certifications
8029	ISOICAL certificate from 601 kg to 1500 kg
8030	ISOICAL certificate from 1501 kg to 3000 kg
8033	ISOICAL certificate from 3001 kg to 10000 kg

M (*) For verified units, "M" indicator and Verification certificate have to be included.

► INDICATOR OPTIONS

Ref.	Model
33799	WiFi Board
32330	3-relay output (K3, K3i)
60033	RS-232 (K2, SC2)
33772	RTC Board (K3, K3i)

► COLUMN BRACKETS / BASES

Ref.	Model
33207	ABS swivel base
3803	Stainless steel U tube base
32278	Stainless steel U wall support
31661	Wall support in painted steel with ABS swivel joint



Ref.	Model
3804	Painted steel base with column
3805	Stainless steel base with column
71337	Stainless steel base with K4i column



Indicator not included.

► CABLES

Ref.	Model
61084	Direct K USB cable
33205	RS-232 cable to RD3 or PC K, 1.5 m
3738	RS-232 cable to RD3 or PC K, 4 m
32294	RS-232 cable to K Printer
36767	RS-232 cable to PC (K2, SC2)
36766	RS-232 cable to Printer (K2, SC2)
36857	RS-232 cable to PC (K4i)
36858	RS-232 cable to Printer (K4i)




► SOFTWARE

Ref.	Model	RRP (€)
----	Xtrem iOS / Android APP	No Charges
----	Xtrem PC Software	No Charges



Ref.	Model	RRP (€)
3792	EX-Link software for PC (**)	No Charges



Ref.	Model
4877	PW-Link software for PC (***)



► PERIPHERALS

Ref.	Model
70814	Q2 labelling printer
70034	PR4 printer (RS-232)



Q2 labelling printer.

Ref.	Accessories for labelling printers
36904	Q2 70x58mm label roll



PR4 Printer.

Ref.	Model
5263	RD3 repeater indicator (RS-232)



Ref.	Model
60210	LED traffic light with relay board



► PLATFORM ACCESSORIES


Ref.	Model
70190	RM-10 Access Ramp for 1210
4267	RM-12 Access Ramp for 1212 and 1512
4520	RM-15 Access Ramp for 1515 and 2015
71179	RL-10 Access Ramp for 1210
71180	RL-12 Access Ramp for 1212 and 1512
71374	RL-15 Access Ramp for 1515 and 2015
70022	BM-10 Bumper (1m) for 1210
70033	BM-12 Bumper (1,2m) for 1210, 1212 and 1512
70024	BM-15 Bumper (1,5m) for 1512, 1515 and 2015
70195	MP-1210 Pit frame & Anchor plates Kit
70245	MP-1212 Pit frame & Anchor plates Kit
70188	MP-1512 Pit frame & Anchor plates Kit
70189	MP-1515 Pit frame & Anchor plates Kit
70244	MP-2015 Pit frame & Anchor plates Kit
4281	MC-1210 One-piece pit frame
60621	MC-1212 One-piece pit frame
4282	MC-1512 One-piece pit frame
4519	MC-1515 One-piece pit frame



Ramp RM



Ramp RL



Bump BM

The image features two units. Each unit is sold separately.



Pit frame & Anchor plates Kit MP



One-piece pit frame MC

(**) Compatible with Z3, K3, K3i, S2, S3-RS, S5i-RS.

(***) Compatible with Z3, K3, K3i, K3i Printer, MK3, MK3 Printer, S2, S3, S5i, S7i.