


GRAM Xtrem Cayman-S



Maximum robustness for heavy use

- High strength platform with Xtrem fully digital weighing core.
- With optional IP-69K protection, for very tough environments.
- Polished with beads and corrosion resistant (AISI 304 or AISI 316).
- Fully autonomous, data sent to an indicator, PC, tablet or iOS or Android smartphone*.
- Maximum safety: important adjustment and calibration data incorporated in the platform.
- Connects to WiFi network* and sends the data to any equipment connected to the IP network.
- Total flexibility: Sends the data via cable and WiFi.

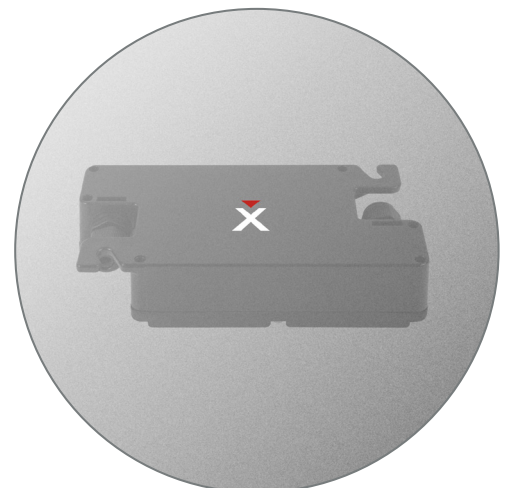

Digital core


Xtrem digital module integrated inside.

*Optional.

Hold

→T←

Time	Item
09:07:46	7638900295641
12:10:26	7638900295641

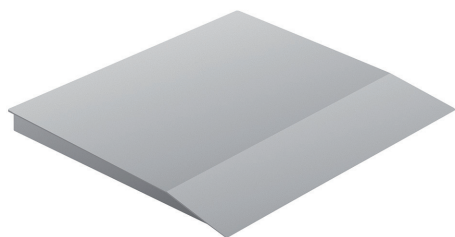

Practical with its access ramp

Double-angle RL ramp for easier access, allowing easier entry for manual pallet trucks.


Model	Dimensions (mm)	Height (mm)
RLI-10	1000 x 1150	105
RLI-12	1200 x 1150	105
RLI-15	1500 x 1150	105

Robust

Sandwich type construction, for maximum strength, with a glass bead pressure blasted polished finish.

Model	Xtrem Cayman-S 88-600 304	Xtrem Cayman-S 1010-600 304	Xtrem Cayman-S 1210-1,5T 304	Xtrem Cayman-S 1210-3T 304	Xtrem Cayman-S 1212-1,5T 304	Xtrem Cayman-S 1212-3T 304	Xtrem Cayman-S 1512-1,5T 304	Xtrem Cayman-S 1512-3T 304	Xtrem Cayman-S 1515-1,5T 304	Xtrem Cayman-S 1515-3T 304	Xtrem Cayman-S 1210-1,5T 316	Xtrem Cayman-S 1210-3T 316	Xtrem Cayman-S 1212-1,5T 316	Xtrem Cayman-S 1212-3T 316	Xtrem Cayman-S 1512-1,5T 316	Xtrem Cayman-S 1512-3T 316	Xtrem Cayman-S 1515-1,5T 316	Xtrem Cayman-S 1515-3T 316
Reference	70311	70312	71708	71709	71710	71711	71712	71713	71714	71715	71719	72003	72004	72005	72006	72007	71720	71721
Capacity (kg)	600	600	1500	3000	1500	3000	1500	3000	1500	3000	1500	3000	1500	3000	1500	3000	1500	3000
Resolution (g)	100	100	500	1000	500	1000	500	1000	500	1000	500	1000	500	1000	500	1000	500	1000
Weighing units	g, kg, lb, oz																	
Connectivity	RS 232-C, WiFi (optional)																	
Transmission speed	9600, 19200, 38400, 57600, 115200 bauds																	
Power	Adapter 230 V/50 Hz (Euro) 7.5 Vdc or via indicator																	
Battery	6V-5AH; Service time 25/60 hours depending on use																	
Working temperature	+5°C / +35°C																	
Sheet metal thickness	5 mm																	
Structure	AISI 304 stainless steel										AISI 316 stainless steel							
Load cells	4 stainless steel cells																	
Junction box	Hermetic with IP-68 protection, in AISI 304 stainless steel										Hermetic with IP-68 protection, in AISI 316 stainless steel							
Dim. platform (mm)	800 x 800	1000 x 1000	1200 x 1000	1200 x 1200		1500 x 1200		1500 x 1500		1200 x 1000		1200 x 1200	1500 x 1200		1500 x 1500			
Minimum height (mm)	105																	
Máximum height (mm)	115																	
Platform net weight (kg)	85	89	91	107		129		155		91		107		129		155		
Packaging dim.	900x900x310	1100x1100x310	1300 x 1100 x 310		1300 x 1300 x 310		1600 x 1300 x 310		1600 x 1600 x 310		1300 x 1100 x 310		1300 x 1300 x 310		1600 x 1300 x 310		1600 x 1600 x 310	
Total weight with packaging (kg)	108	110	112	128		156		188		112		128		156		188		

External dimensions (mm)

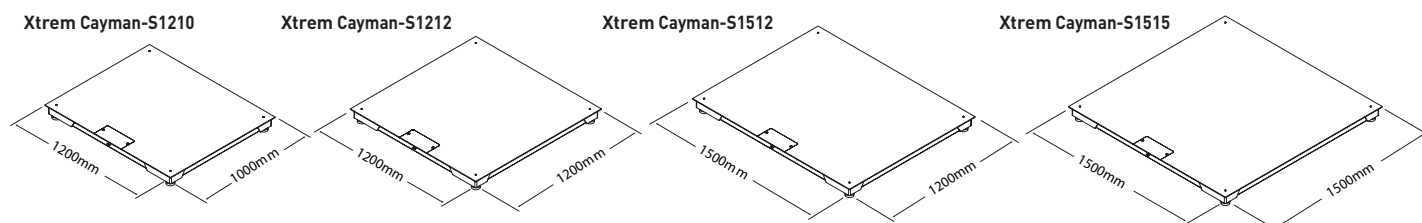



► K3 INDICATOR

Compatible **XTREM**

Ref.	Model	Connection
6170	K3-W	WiFi

Ref.	Model	Connection
6170	K3-X	Cable



► K3i INDICATOR

Compatible **XTREM**

Ref.	Model	Connection
6171	K3i-W	WiFi

Ref.	Model	Connection
6171	K3i-X	Cable



► K3i Printer INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60960	K3i Printer	100,000 divisions



► SC2 INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
5305	SC2 (*)	30,000 divisions



► K4i INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60136	K4i (*) M	30,000 / 60,000 div.



► K2 INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60018	K2 (*) M	60,000 divisions



► K2E INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60020	K2E (*) M	60,000 divisions



► K2N INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60019	K2N (*) M	60,000 divisions



► K2P INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.

Ref.	Model	Resolution
60022	K2P (*) M	60,000 divisions



► VERIFICATION

Ref.	Certifications
8016	CE verification certificate from 301 kg to 600 kg (*) M
8031	CE verification certificate from 601 kg to 1500 kg (*) M
8032	CE verification certificate from 1501 kg to 3000 kg (*) M

Ref.	Certifications
8025	ISOCAL certificate from 301 kg to 600 kg
8029	ISOCAL certificate from 601 kg to 1500 kg
8030	ISOCAL certificate from 1501 kg to 3000 kg

M (*) For verified units, "M" indicator and Verification certificate have to be included.

► INDICATOR OPTIONS

Ref.	Model
33799	WiFi Board
32330	3-relay output (K3, K3i)
60033	RS-232 (K2, SC2)
33772	RTC Board (K3, K3i)

► COLUMN BRACKETS / BASES

Ref.	Model
33207	ABS swivel base
3803	Stainless steel U tube base
32278	Stainless steel U wall support
31661	Wall support in painted steel with ABS swivel joint



Ref.	Model
3804	Painted steel base with column
3805	Stainless steel base with column
71337	Stainless steel base with K4i column



Indicator not included.


► CABLES

Ref.	Model
61084	Direct K USB cable
33205	RS-232 cable to RD3 or PC K, 1.5 m
3738	RS-232 cable to RD3 or PC K, 4 m
32294	RS-232 cable to K Printer
36767	RS-232 cable to PC (K2, SC2)
36766	RS-232 cable to Printer (K2, SC2)
36857	RS-232 cable to PC (K4i)
36858	RS-232 cable to Printer (K4i)




► SOFTWARE

Ref.	Model	RRP (€)
----	Xtrem iOS / Android APP	No Charges
----	Xtrem PC Software	No Charges



Ref.	Model	RRP (€)
3792	EX-Link software for PC (**)	No Charges



Ref.	Model
4877	PW-Link software for PC (***)



► PERIPHERALS

Ref.	Model
70814	Q2 labelling printer
70034	PR4 printer (RS-232)



Q2 labelling printer.

Ref.	Accessories for labelling printers
36904	Q2 70x58mm label roll



PR4 Printer.

Ref.	Model
5263	RD3 repeater indicator (RS-232)




Ref.	Model
60210	LED traffic light with relay board



► PLATFORM ACCESSORIES

Ref.	Model
71183	RLI-10 Access Ramp for 1210
71184	RLI-12 Access Ramp for 1212 and 1512
71185	RLI-15 Access Ramp for 1515 and 2015
60985	MPI-1210 Pit frame & Anchor plates Kit
70925	MPI-1212 Pit frame & Anchor plates Kit
4843	MPI-1512 Pit frame & Anchor plates Kit
70807	MPI-1515 Pit frame & Anchor plates Kit



Ramp RLI

Ref.	Model
36948	C3 cells nickel-plated steel IP67
36949	C3 cells stainless steel IP68
70801	C3 cells stainless steel IP69K
36950	C3 cells stainless steel IP69K Plus



C3 cells

(**) Compatible with Z3, K3, K3i, S2, S3-RS, S5i-RS.

(***) Compatible with Z3, K3, K3i, K3i Printer, MK3, MK3 Printer, S2, S3, S5i, S7i.