

GRAM Xtrem Mamut



Large size and robust

- Highly rigid platform, suitable for heavy loads, with digital Xtrem weighing core.
- Built in heavy duty monobloc steel, for use on floor or recessed installation.
- Fully autonomous, data sent to an indicator, PC, tablet or iOS or Android smartphone*.
 - Maximum safety: important adjustment and calibration data incorporated in the platform.
 - Connects to WiFi network* and sends the data to any equipment connected to the IP network.
 - Total flexibility: Sends the data via cable and WiFi.



Digital core

Xtrem digital module integrated inside.

*Optional.

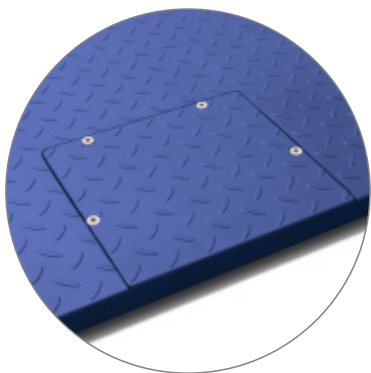
Hold

→T←

Time	Item
09:07:46	7638900295641
12:10:26	7638900295641

Non-slip

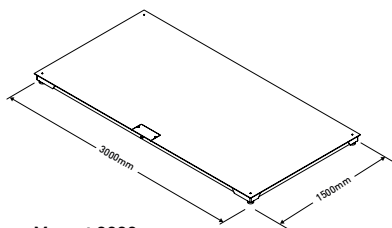
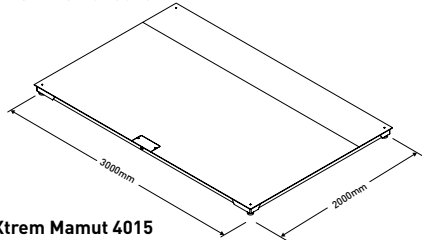
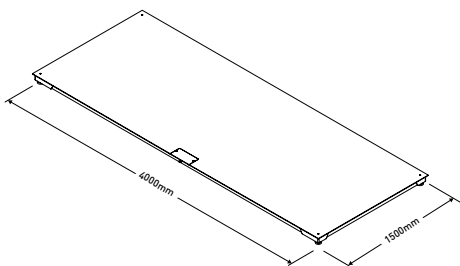
Its diamond plate steel surface with baked epoxy paint treatment gives it great wear resistance.

**Easy maintenance**

Upper access to the adjustment junction box for easy maintenance of equipment.

Low height

Its height of only 115 cm makes weighing easier.

External dimensions (mm)**Xtrem Mamut 3015****Xtrem Mamut 3020****Xtrem Mamut 4015**

Model	Xtrem Mamut 3015-3T	Xtrem Mamut 3020-3T	Xtrem Mamut 3020-6T	Xtrem Mamut 4015-6T
Reference	60907	60908	60909	60910
Capacity	3000 kg	3000 kg	6000 kg	6000 kg
Resolution	1000 g	1000 g	2000 g	2000 g
Weighing units	g, kg, lb, oz			
Connectivity	RS 232-C, WiFi (optional)			
Transmission speed	9600, 19200, 38400, 57600, 115200 bauds			
Power	Adapter 230 V/50 Hz (Euro) 7.5 Vdc or via indicator			
Working temperature	-10°C / +40°C			
Sheet metal thickness	5.5 mm			
Structure thickness	3 mm		4 mm	
Structure	Steel coated in kiln-fired epoxy resin			
Load cells	4 stainless steel cells			
Junction box	Hermetic with IP-68 protection, in AISI 304 stainless steel			
Platform dim. (mm)	3000 X 1500	3000 X 2000		4000 X 1500
Minimum height (mm)	115			
Máximum height (mm)	125			
Platform net weight (kg)	165	410	415	415
Packaging dim.	3010 X 1510x 105	3010 X 2010 x 105		4010 X 1510 x 105
Total weight with packaging (kg)	205	450	465	465



► K3 INDICATOR

Compatible **XTREM**

Ref.	Model	Connection
6170	K3-W	WiFi



Ref.	Model	Connection
6170	K3-X	Cable



► K3i INDICATOR

Compatible **XTREM**

Ref.	Model	Connection
6171	K3i-W	WiFi



Ref.	Model	Connection
6171	K3i-X	Cable



► K3i Printer INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.



Ref.	Model	Resolution
60960	K3i Printer	100,000 divisions



► SC2 INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.



Ref.	Model	Resolution
5305	SC2 (*)	30,000 divisions



► K4i INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.



Ref.	Model	Resolution
60136	K4i (*) M	30,000 / 60,000 div.



► K2 INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.



Ref.	Model	Resolution
60018	K2 (*) M	60,000 divisions



► K2E INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.



Ref.	Model	Resolution
60020	K2E (*) M	60,000 divisions



► K2N INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.



Ref.	Model	Resolution
60019	K2N (*) M	60,000 divisions



► K2P INDICATOR (*)

(*) Indicator not compatible with Xtrem digital equipment
Only compatible with analogue equipment.



Ref.	Model	Resolution
60022	K2P (*) M	60,000 divisions

► VERIFICATION

Ref.	Certifications
8031	CE verification certificate from 601 kg to 1500 kg (*) M
8032	CE verification certificate from 1501 kg to 3000 kg (*) M

Ref.	Certifications
8029	ISOCAL certificate from 601 kg to 1500 kg
8030	ISOCAL certificate from 1501 kg to 3000 kg



► INDICATOR OPTIONS

Ref.	Model
33799	WiFi Board
32330	3-relay output (K3, K3i)
60033	RS-232 (K2, SC2)
33772	RTC Board (K3, K3i)

► COLUMN BRACKETS / BASES

Ref.	Model
33207	ABS swivel base
3803	Stainless steel U tube base
32278	Stainless steel U wall support
31661	Wall support in painted steel with ABS swivel joint



Ref.	Model
3804	Painted steel base with column
3805	Stainless steel base with column
71337	Stainless steel base with K4i column



Indicator not included.

► CABLES

Ref.	Model
61084	Direct K USB cable
33205	RS-232 cable to RD3 or PC K, 1.5 m
3738	RS-232 cable to RD3 or PC K, 4 m
32294	RS-232 cable to K Printer
36767	RS-232 cable to PC (K2, SC2)
36766	RS-232 cable to Printer (K2, SC2)
36857	RS-232 cable to PC (K4i)
36858	RS-232 cable to Printer (K4i)



► SOFTWARE

Ref.	Model	RRP (€)
----	Xtrem iOS / Android APP	No Charges
----	Xtrem PC Software	No Charges



Ref.	Model	RRP (€)
3792	EX-Link software for PC (**)	No Charges



Ref.	Model
4877	PW-Link software for PC (***)



► PERIPHERALS

Ref.	Model	RRP (€)
70814	Q2 labelling printer	190.00
70034	PR4 printer (RS-232)	150.00



Q2 labelling printer.

Ref.	Accessories for labelling printers	RRP (€)
36904	Q2 70x58mm label roll	12.00



PR4 Printer.

Ref.	Model	RRP (€)
5263	RD3 repeater indicator (RS-232)	140.00




Ref.	Model	RRP (€)
60210	LED traffic light with relay board	160.00



► PLATFORM ACCESSORIES

Ref.	Model
71313	MP-3015 Pit frame & Anchor plates Kit
71314	MP-3020 Pit frame & Anchor plates Kit
71315	MP-4015 Pit frame & Anchor plates Kit



Pit frame & Anchor plates Kit MP

(**) Compatible with Z3, K3, K3i, S2, S3-RS, S5i-RS.

(***) Compatible with Z3, K3, K3i, K3i Printer, MK3, MK3 Printer, S2, S3, S5i, S7i.